



Sampling particle emissions from brake and tyre wear

Louisa Kramer, Jon Andersson, Michael Campbell, Ian Marshall, John Norris, Simon de Vries, Gary Waite and Jason Southgate (Ricardo), Arup AECOM consortium, UK Department for Transport (DfT)

AGENDA

Introduction to non-exhaust emissions


Measurement of brake and tyre wear

System design and testing

Results



Summary

Non-exhaust emissions (NEE)

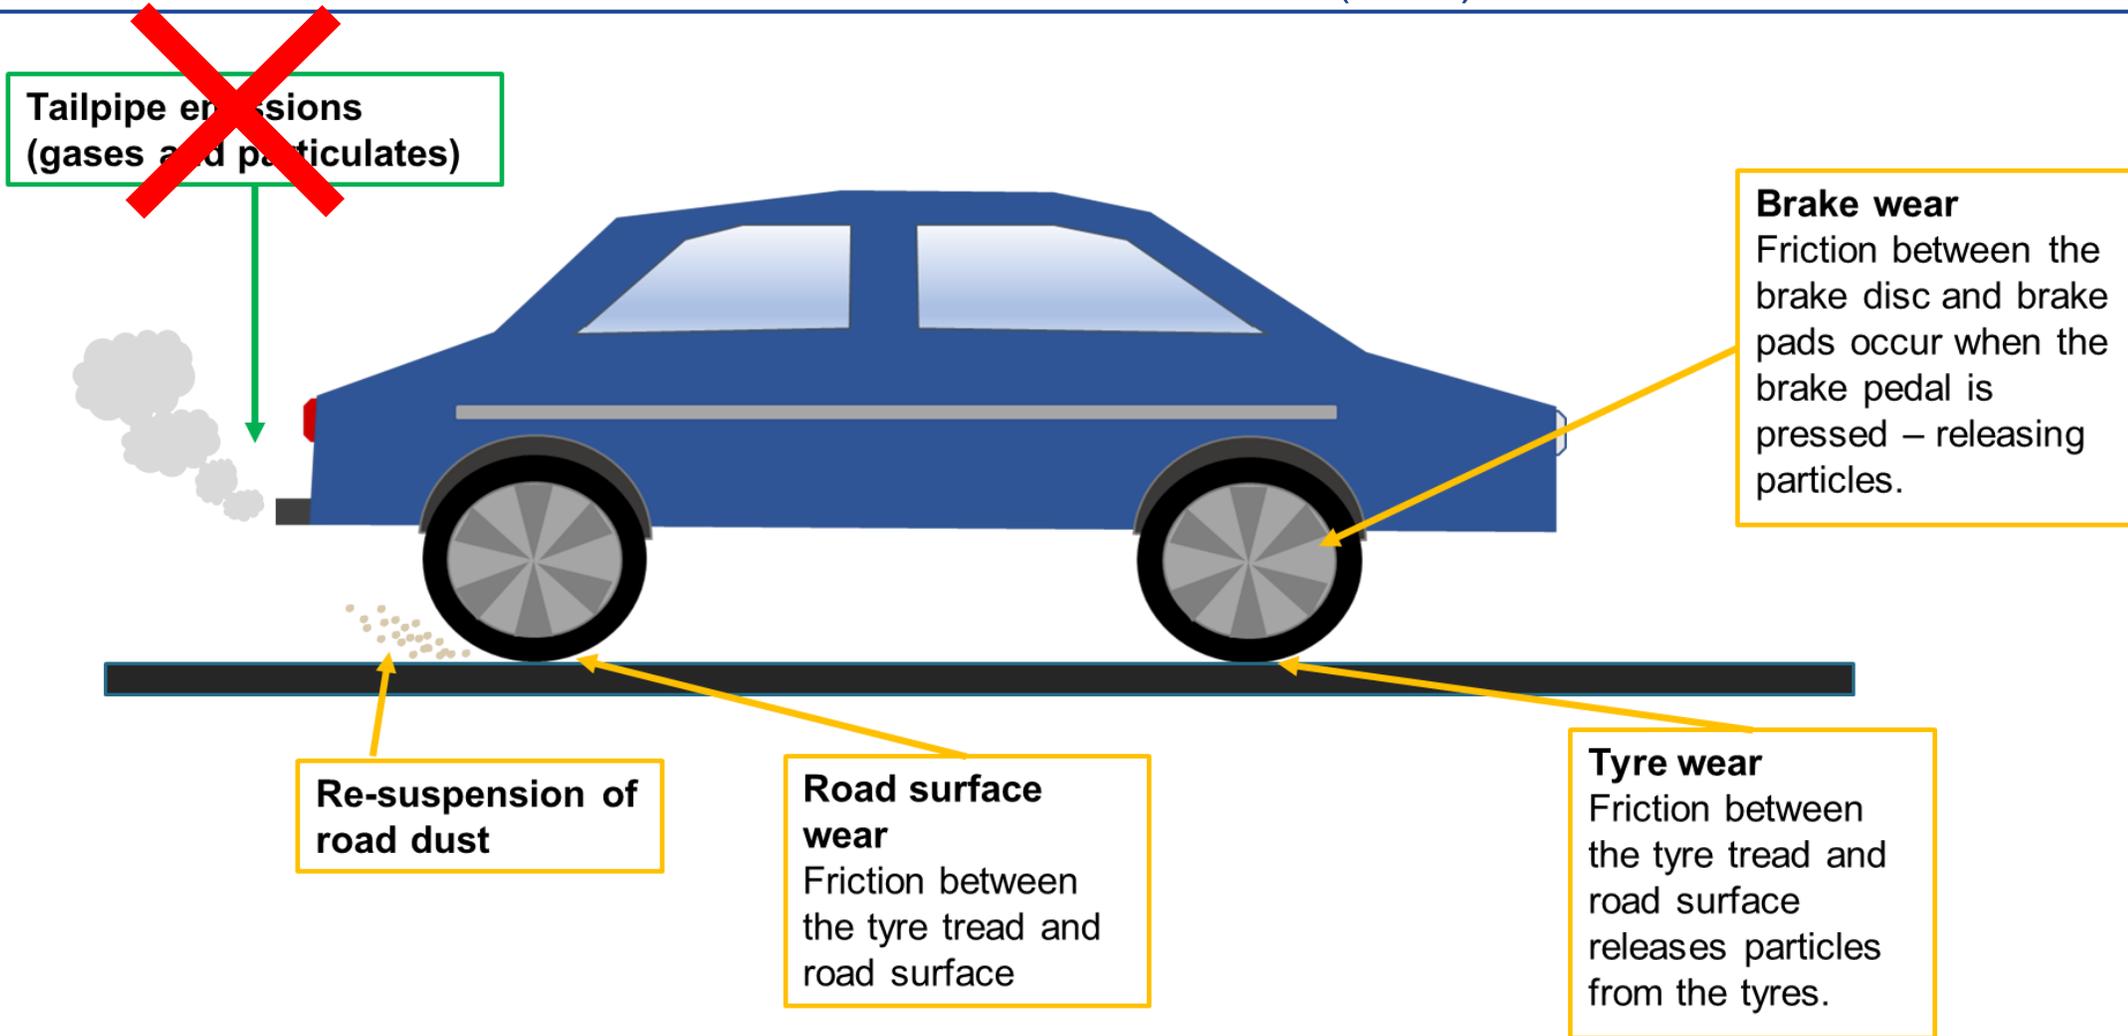

Non-exhaust emissions (NEE) in the UK

- Emissions of PM from exhausts has decreased since the mid-90s
- However, the contribution of NEE to particulate matter (PM) from traffic has increased
- In the UK, brake and tyre wear emissions are now the primary source of PM₁₀ and PM_{2.5} from road transport
- There is a transition towards zero (exhaust) emission vehicles on the road. Resulting in a need to measure, understand and control non-exhaust emissions

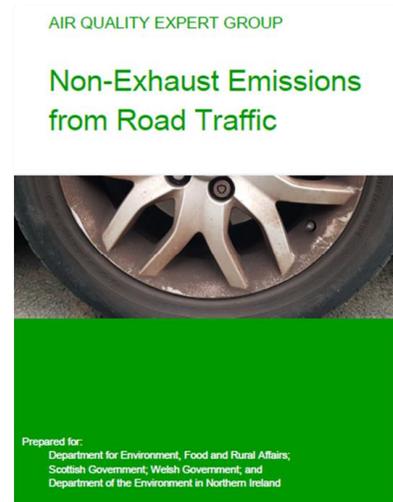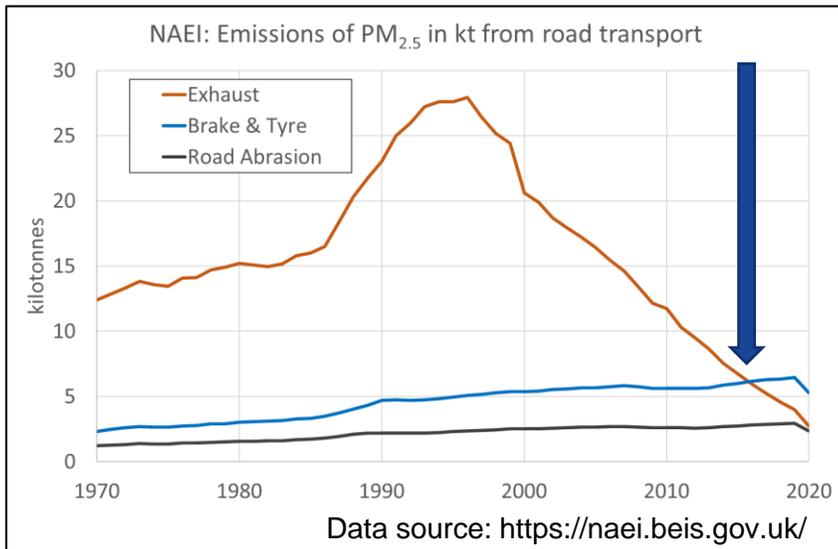

Department
for Environment
Food & Rural Affairs

Department
for Transport

Office for Low Emission
Vehicles

Consultation outcome

**Brake, tyre and road surface wear call for
evidence: summary of responses**

Updated 11 July 2019


Measurement of brake and tyre wear

To determine the impact of NEE on PM in the atmosphere, emission factors (EF) need to be determined. These will depend on many variables such as:

- Vehicle type
- Vehicle weight
- Driving style
- Brake and tyre materials
- Road surface
- Temperatures

Studies have used different methods to estimate NEE PM EFs and this can result in varying results

A standard regulated method (similar to that used for exhaust emissions) is needed to assess NEE

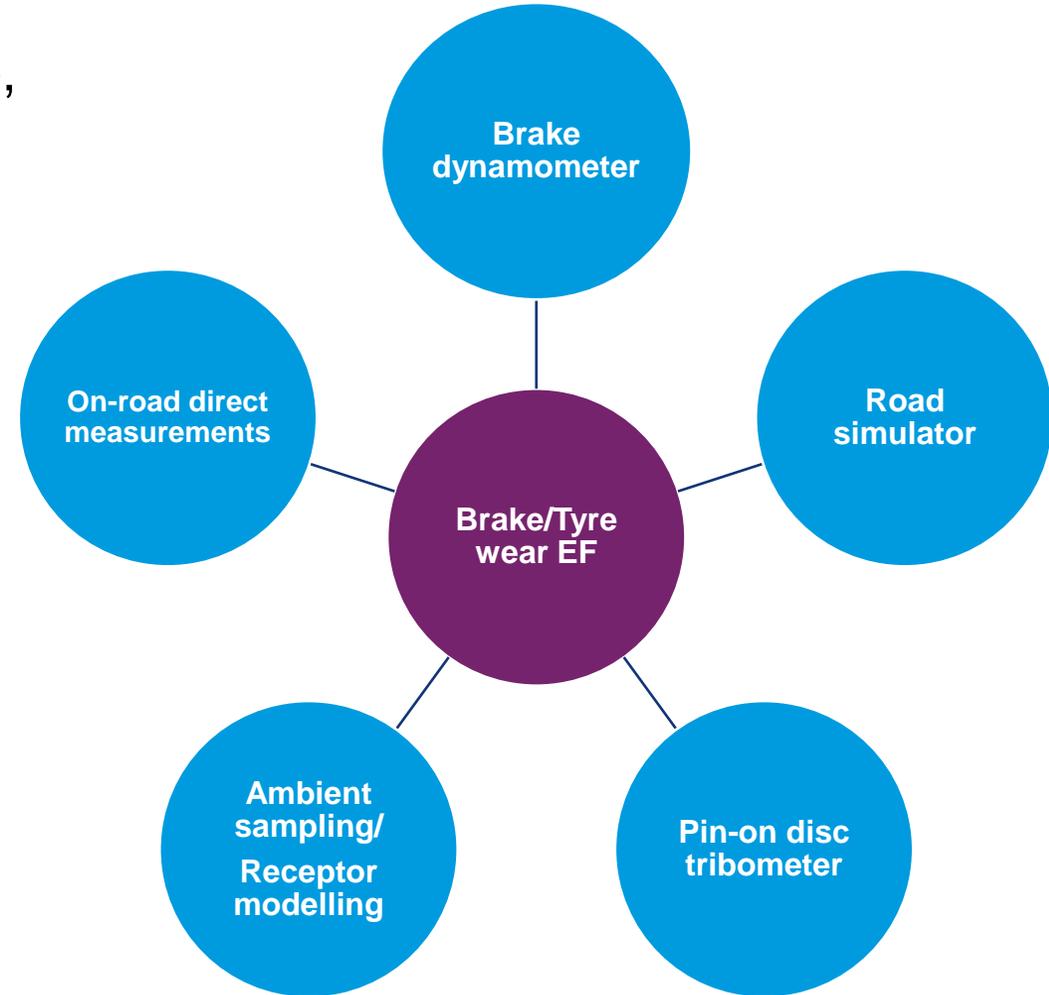


International work on regulation

- UNECE is developing internationally recognised test procedures to measure brake and tyre particles
- Measuring **tyre and road** wear particles is technically very complex
 - Ongoing work should lead to a **tyre abrasion** test procedure and limits in regulation in late 2023
- Work on measuring **brake** wear is more advanced
 - First draft of UN regulation on test procedure (co-sponsored by UK DfT) is expected in early 2023
 - EU has proposed limits on car (M1/N1) brake emissions within Euro 7, with initial limits set, during brake dynamometer testing, at 7 mg/km
 - Proposal for this limit to drop to 3 mg/km in 2035




Measurement of brake and tyre wear

- Ricardo is supporting the Department for Transport in the UK to develop an effective system and methodology for measuring and characterising particles emitted from brake and tyre wear under **real driving** conditions **(Phase 1)**
- **Primary aim is to develop emissions factors**
- In developing the system there was a need to consider:
 - A common sampling system and measurement equipment which can be used for both brake and tyre wear
 - Representative sample collection of particles from brake or tyre wear
 - Repeatable and reproducible measurements
 - Careful consideration of background particles (i.e. re-suspension of road dust, tailpipe emissions)
 - Power and spatial demands of the system



System design: brake wear sampling

Front face of the
brake enclosure

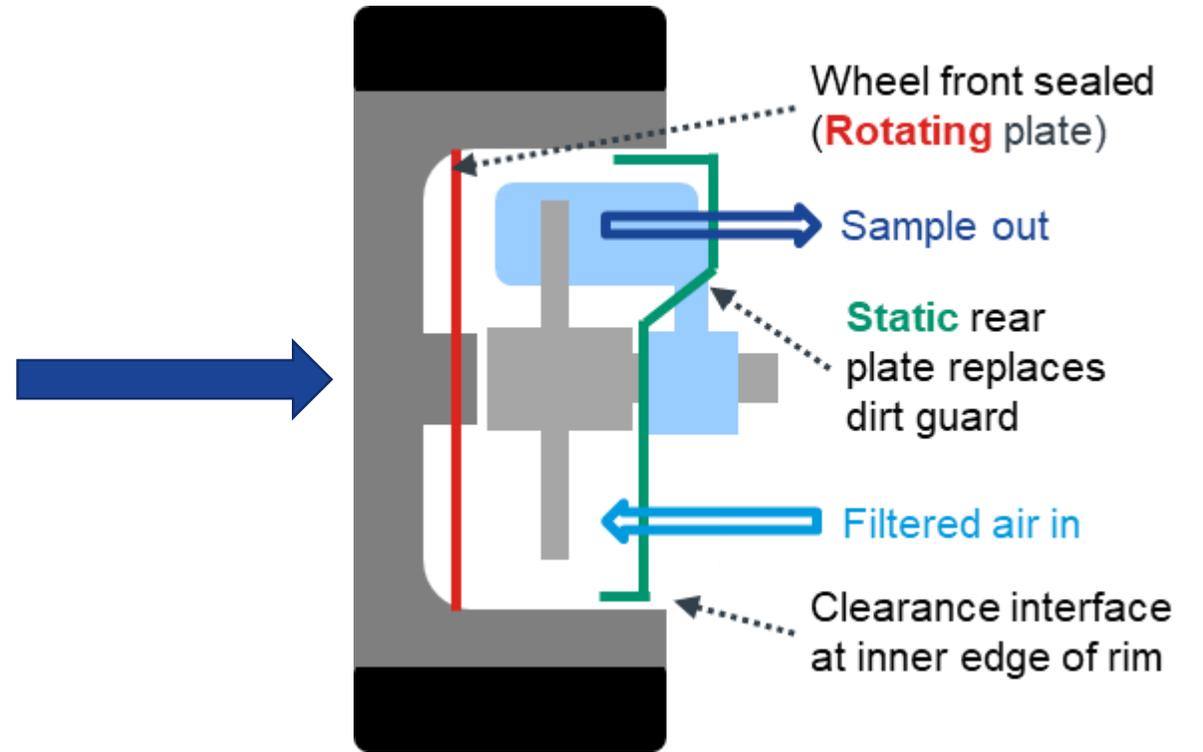

3 enclosure approaches used – to explore application to different braking system types



System design: tyre wear sampling




- Open duct to draw sample from behind the tyre-road contact patch into the measurement system
- Inlet fabricated to be slightly wider than the tyre, and just above the road. It is angled to keep sufficient entry velocity for the sample flow and allow large material to drop out
- The duct was mounted to a bracket which in turn was fixed to the rear of the wheel hub carrier, so that the duct position is fixed relative to the wheel and swings with the wheel as it steers
- Sample probes for monitoring background ambient particulates were fitted to the front of the vehicle

Test plan and drive cycles


Tests	Details
Background sampling	Sampling background emissions from different inlets
Chassis Dyno	PG-42 cycles - sampling from brake and tyres
On-road/Track	Urban driving; track braking events of different magnitudes

- Repeated measurements were undertaken for all tests
- Results shown here from instrumented **front** brake and front tyre from the same wheel

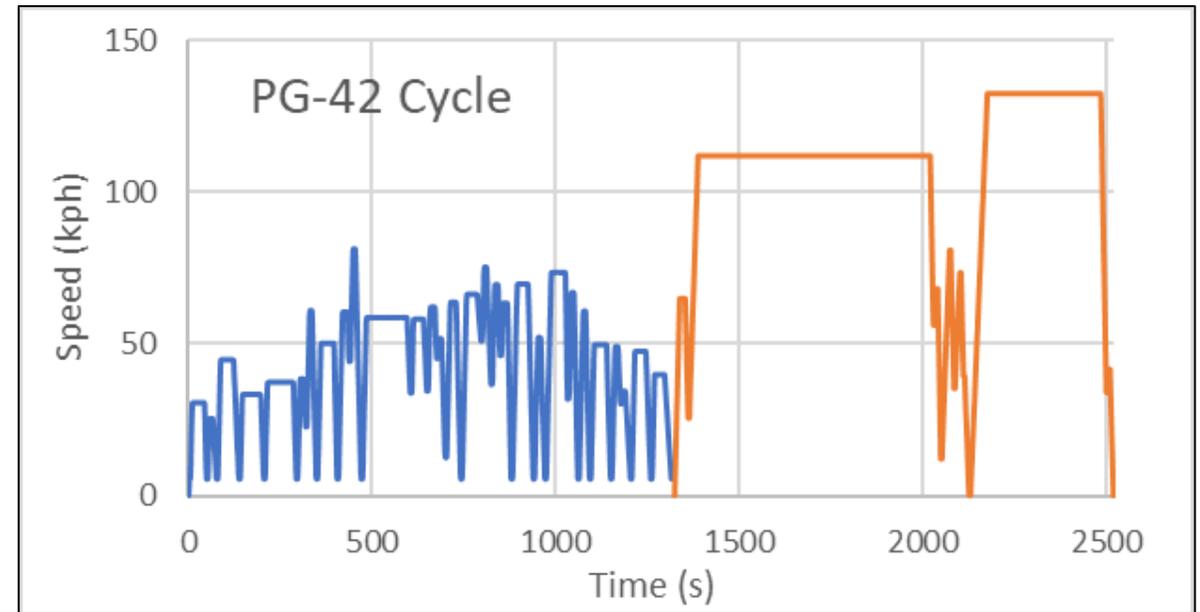

PG-42 - 42 minutes cycle based on high particle emitting sections of two well-known braking cycles: Worldwide Harmonized Light Vehicles Test Procedure (WLTP) and Los Angeles City Traffic (LACT).

System design – Instrumentation

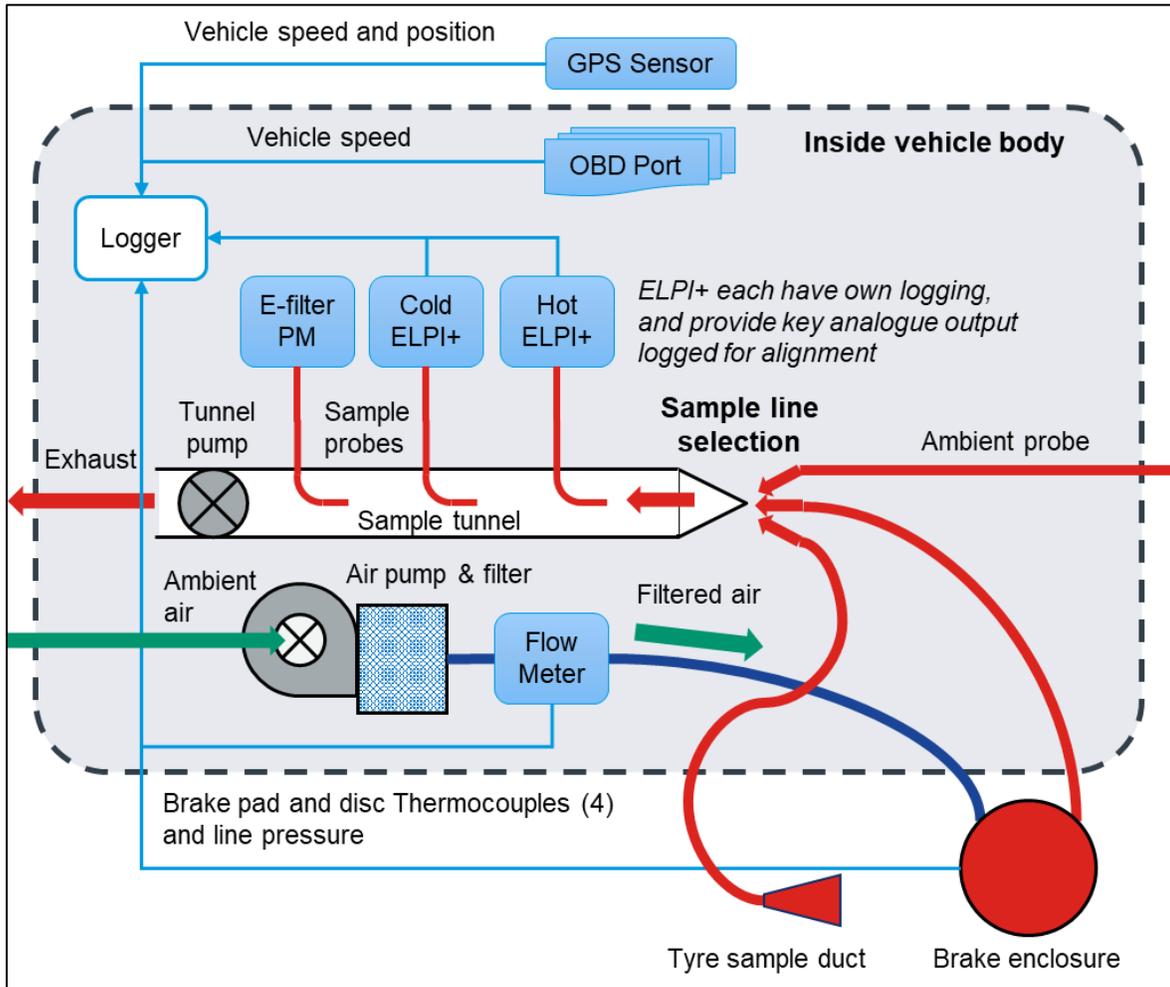


Sample analysis included:

- Combination of two Dekati® Electrical Low Pressure Impactors (ELPI+) for real-time particle size distribution and concentration (size range 6 nm – 10 µm)
 - “Cold” ELPI+ measures solid and volatile particles
 - “Hot” ELPI+ includes a 180°C heated inlet to remove the volatile component of the PM
- Dekati® eFilter for real-time PM mass concentration measurements – also includes a filter for reference gravimetric determination and analysis
- Horiba SPCS PN23 system used in parallel from tunnel for lab tests


The entire system was installed to a small light duty van and measurements undertaken from the front wheel

VW caddy vehicle

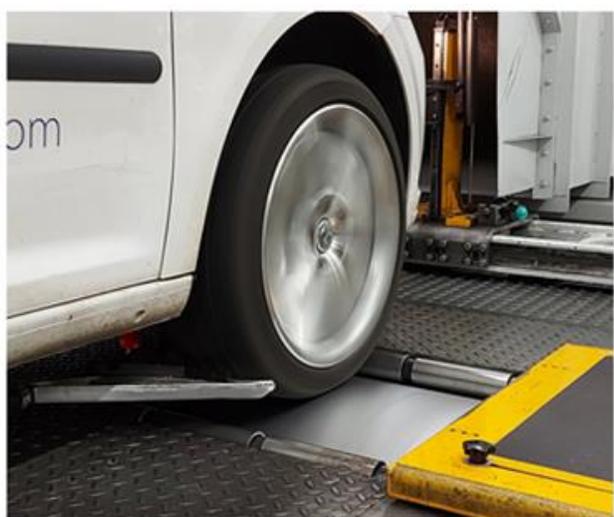


Left door			Rear door		Right door	
Cold ELPI+	E-Filter	Hot ELPI+	ELPI+ laptops	Hot ELPI+	E-Filter	Cold ELPI+
A detailed view of the interior of the van, showing a complex setup of air quality monitoring equipment. Yellow arrows point from labels to specific components. The equipment is mounted on a wooden table and includes various filters, pumps, fans, and sensors.						
Li-Ion batteries (2 packs)	Sample tunnel	Sample pumps (x4)	Li-Ion battery (1 pack)	Brake air fans & filters	Brake air flow-meter	Sample pipes through floor


Particle penetration through sampling system

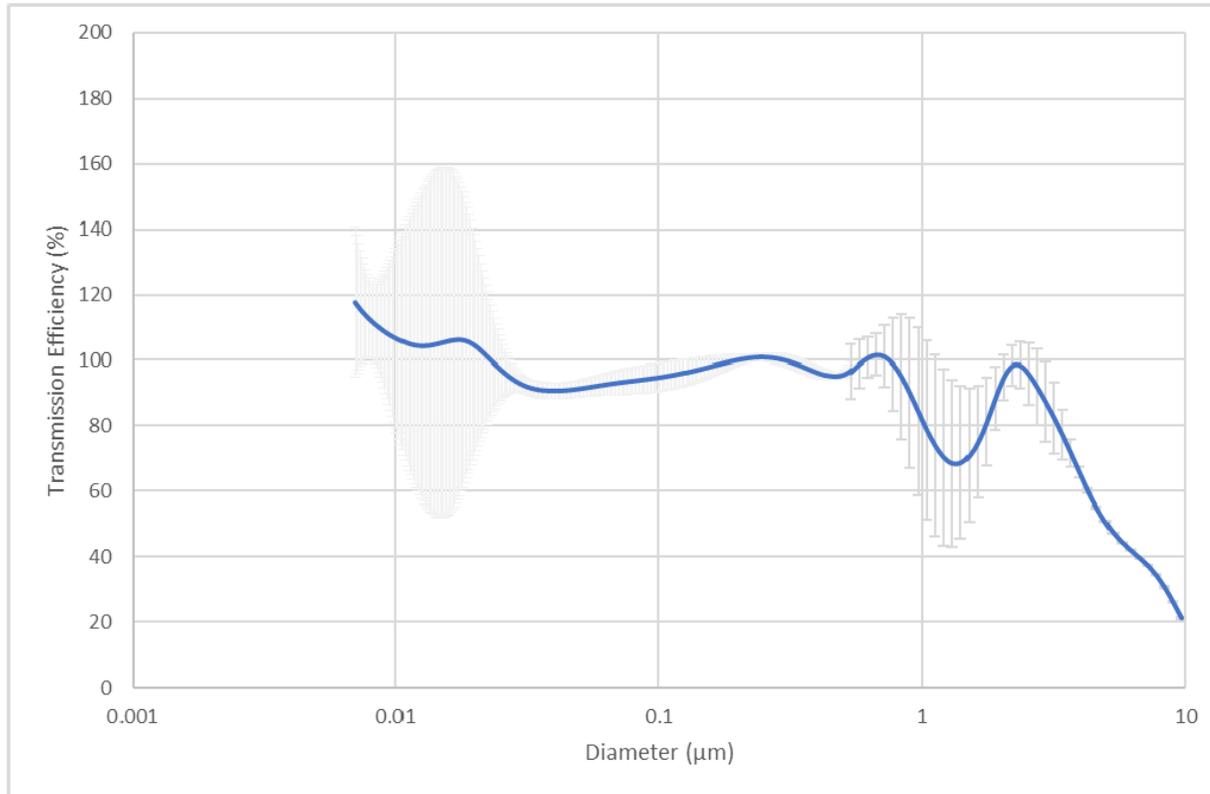

- Penetration close to 100% for particles up to $\sim 3\mu\text{m}$
 - Hence under-sampling of larger particles, which will have impacted PM_{10} determination by eFilter and gravimetry
 - $\text{PM}_{2.5}$ quantification likely to be more representative and a more realistic objective for on-board sampling



Real time brake emissions: chassis dynamometer

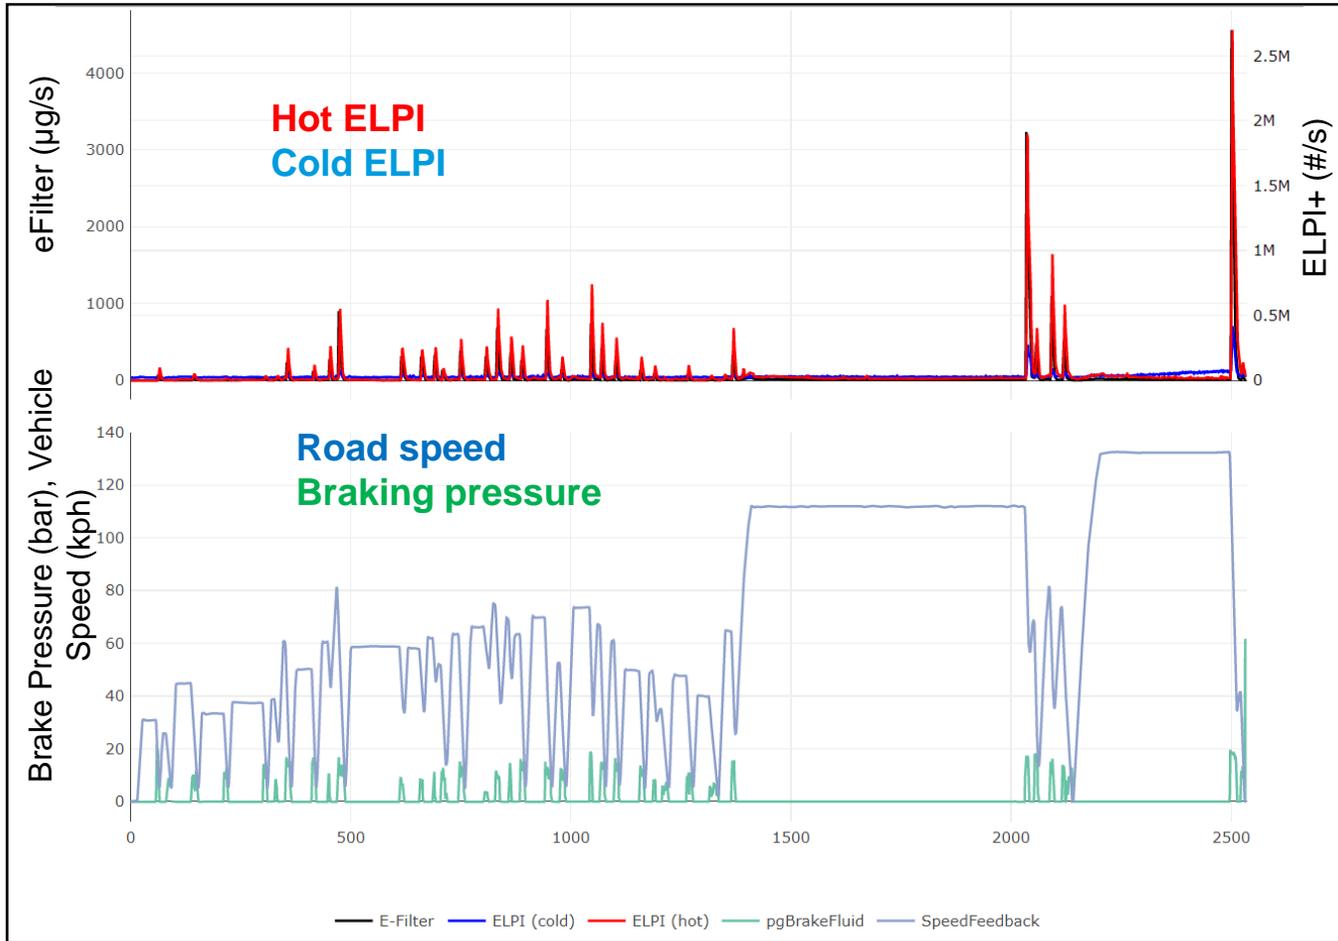


- Particle number and particle mass emissions from the hot ELPI and eFilter coincided with increased braking pressure events on the chassis dynamometer
- Emissions from the cold ELPI were coincident, but more challenging to resolve
- Hot ELPI/SPCS emissions $\sim 5 \times 10^9$ #/km/brake, PG-42 CoV - 4% SPCS and 40% hot ELPI
- PM filter emissions ~ 1.6 mg/km/brake


3 repeat PM filters from PG-42 brake testing




Thermogravimetric analysis of filters indicated $\sim 95\%$ non-volatile and non-oxidizable material



Real time brake emissions: urban road

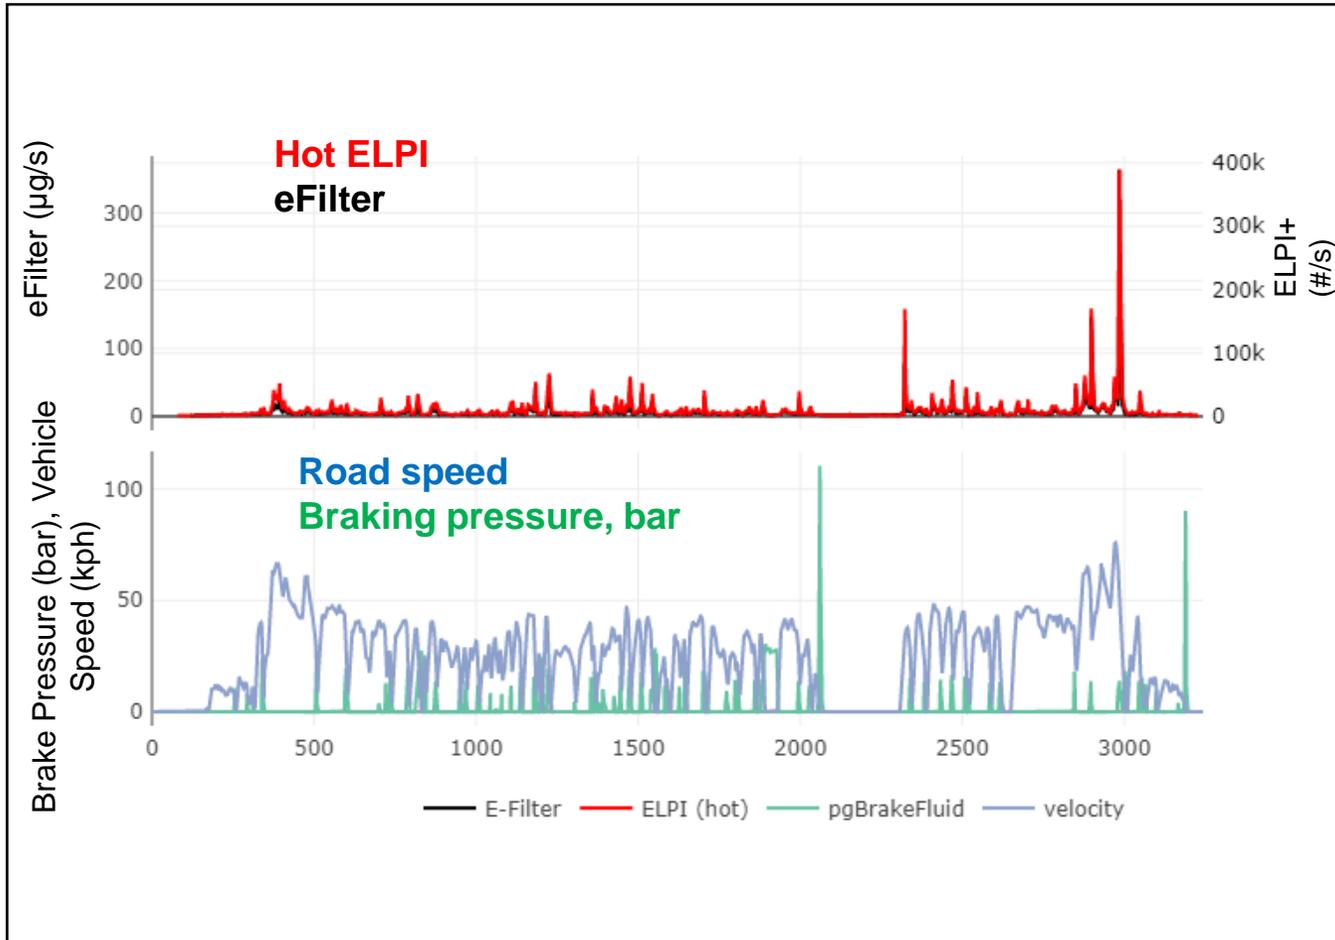


- Braking events on the urban road are representative of real-world driving
- Particle number and particle mass emissions events reported from braking overlay from the hot ELPI and eFilter
- Similar to the chassis dyno tests - emissions from the cold ELPI were more challenging to attribute to specific braking events
- Hot ELPI emissions 2 to 5×10^9 #/km/brake
 - Cold ELPI similar
- PM filter emissions ~ 0.9 mg/km/brake



Real time brake emissions: particle mass size distributions


Mass Weighted Particle Size Distributions, Cold ELPI

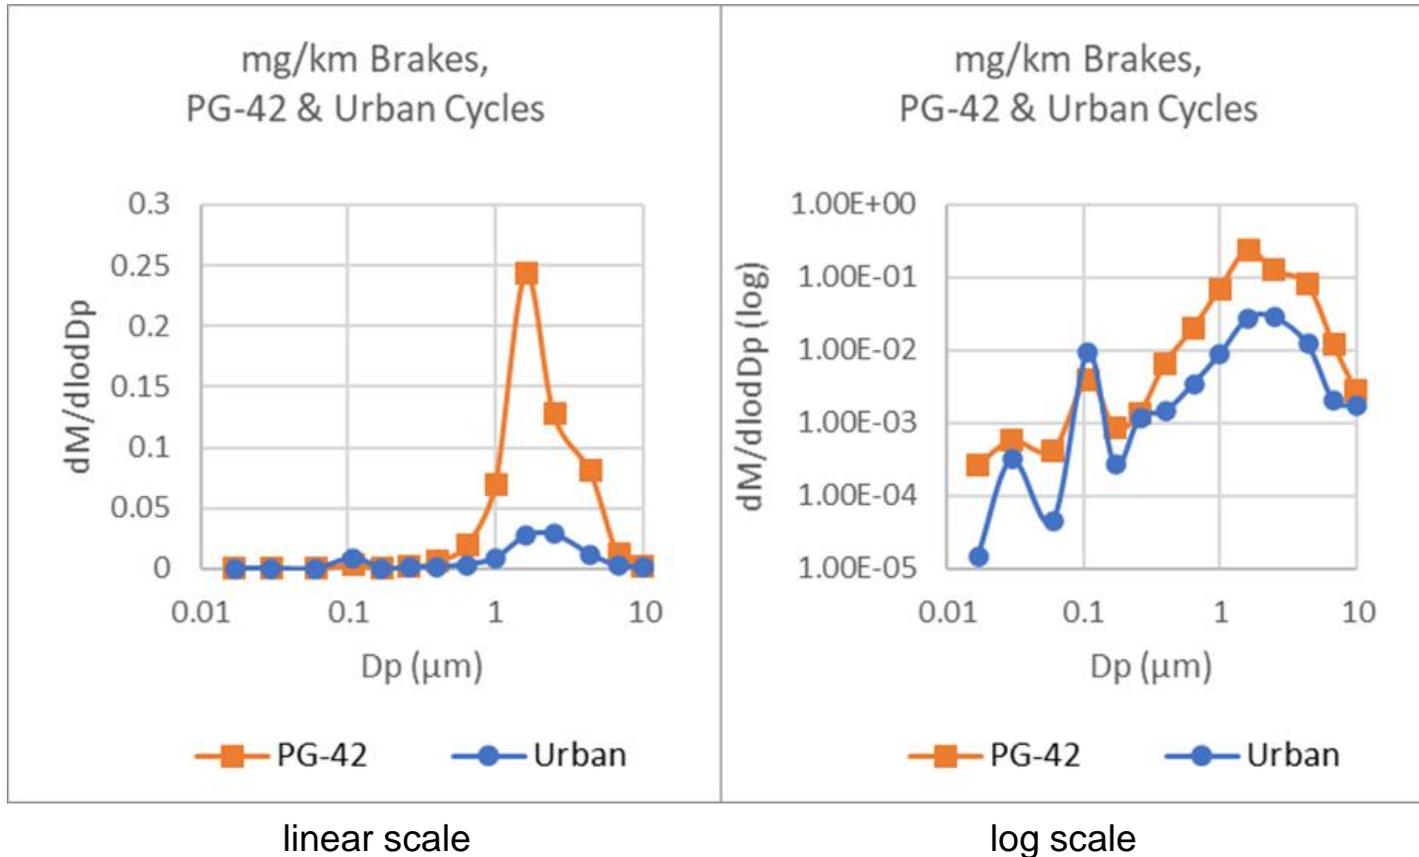

- Mass weighted particle size distributions from the PG-42 and urban drives are generally similar
 - Mass greater from more aggressive PG-42
- Two modes observed: a minor mode at $\sim 100\text{nm}$ ($0.1\mu m$) and a dominant mode at $\sim 1.6\mu m$
- The $>1\mu m$ mode is likely to be mechanically generated wear materials primarily released from the brake pad




Real time tyre emissions: chassis dynamometer

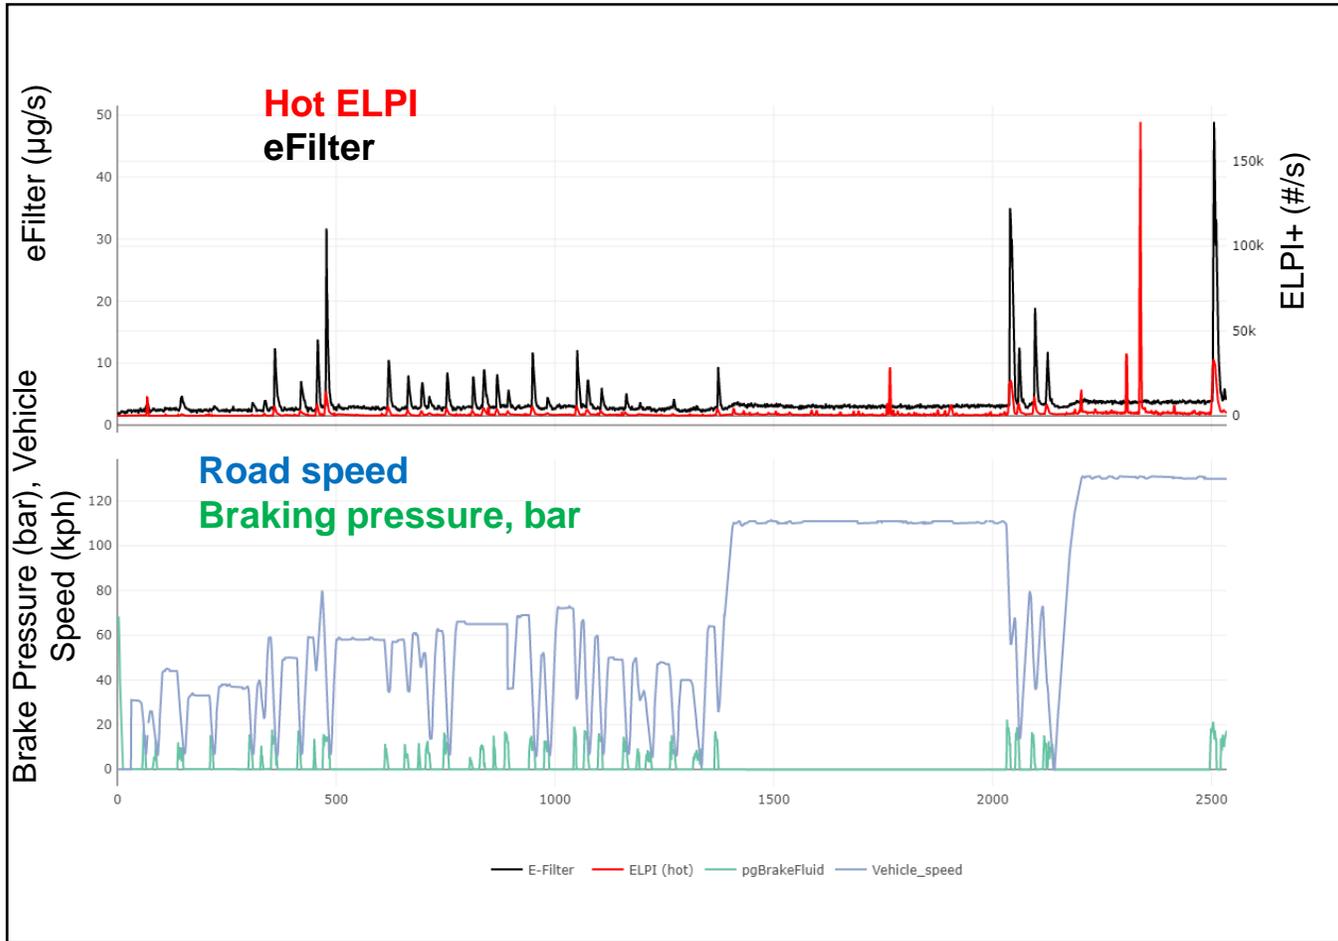

- Spikes of particle number emissions were observed from the ELPIs, both during braking events but also during accelerations and cruises
 - Indicating particles maybe be lost following, as well as during, braking events
- eFilter mass emissions appear to be closely related to the braking events
 - Most mass is lost immediately on braking
- Masses measured were an order of magnitude lower for tyre emissions than for the brake emissions
 - The efficiency of the tyre scoop is uncertain, and is to be explored in further work



Real time tyre emissions: urban road

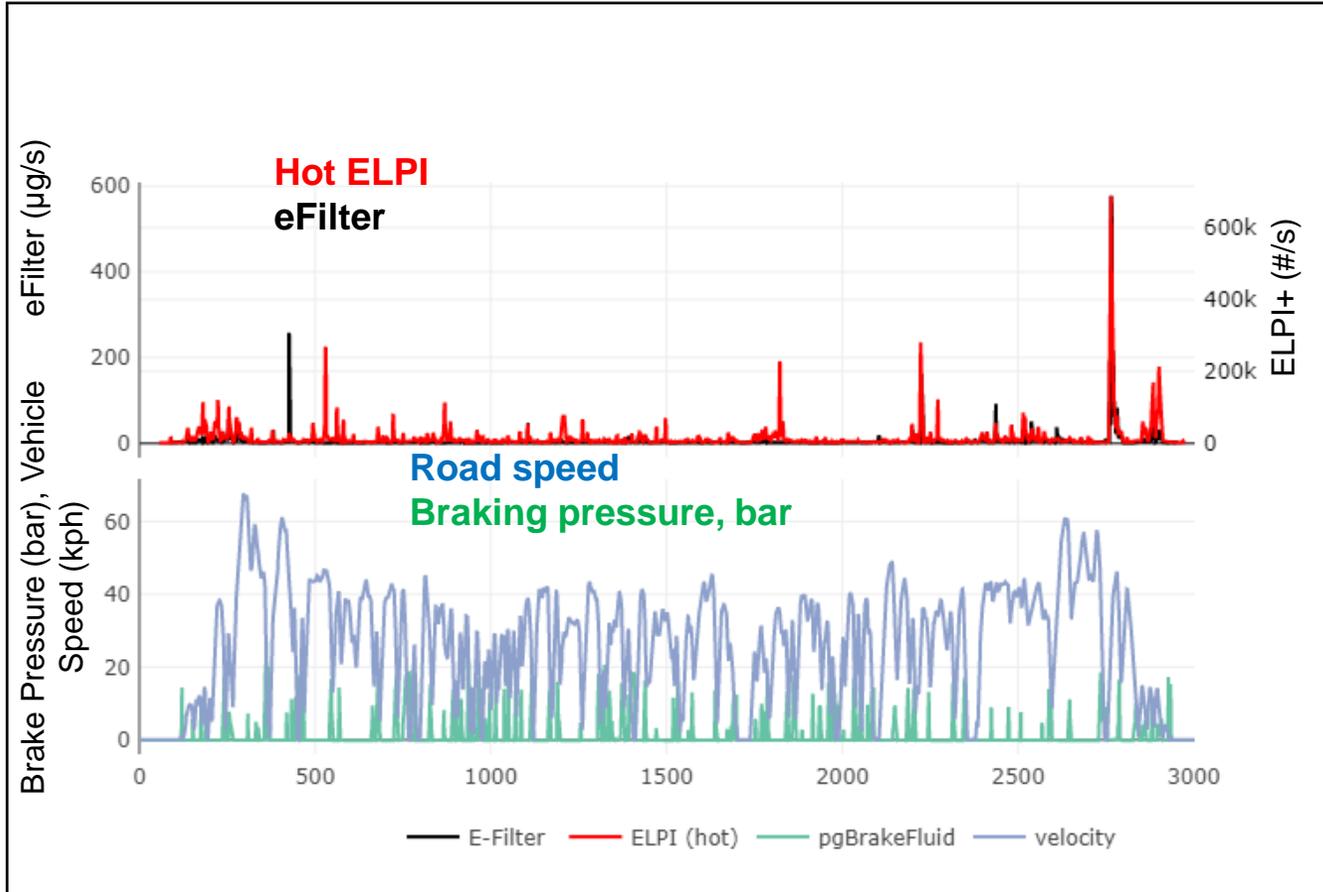


- Some urban braking events coincide with an emissions peak, however, not all do
- Peaks of both mass and number can also be observed that are not related to instantaneous braking events
- Emissions of both mass and number were higher on the urban road, compared to the chassis dyno, despite less severe braking events
 - Substantial contribution from source(s) other than braking



Real time tyre emissions: particle mass size distributions


Mass Weighted Particle Size Distributions, Cold ELPI

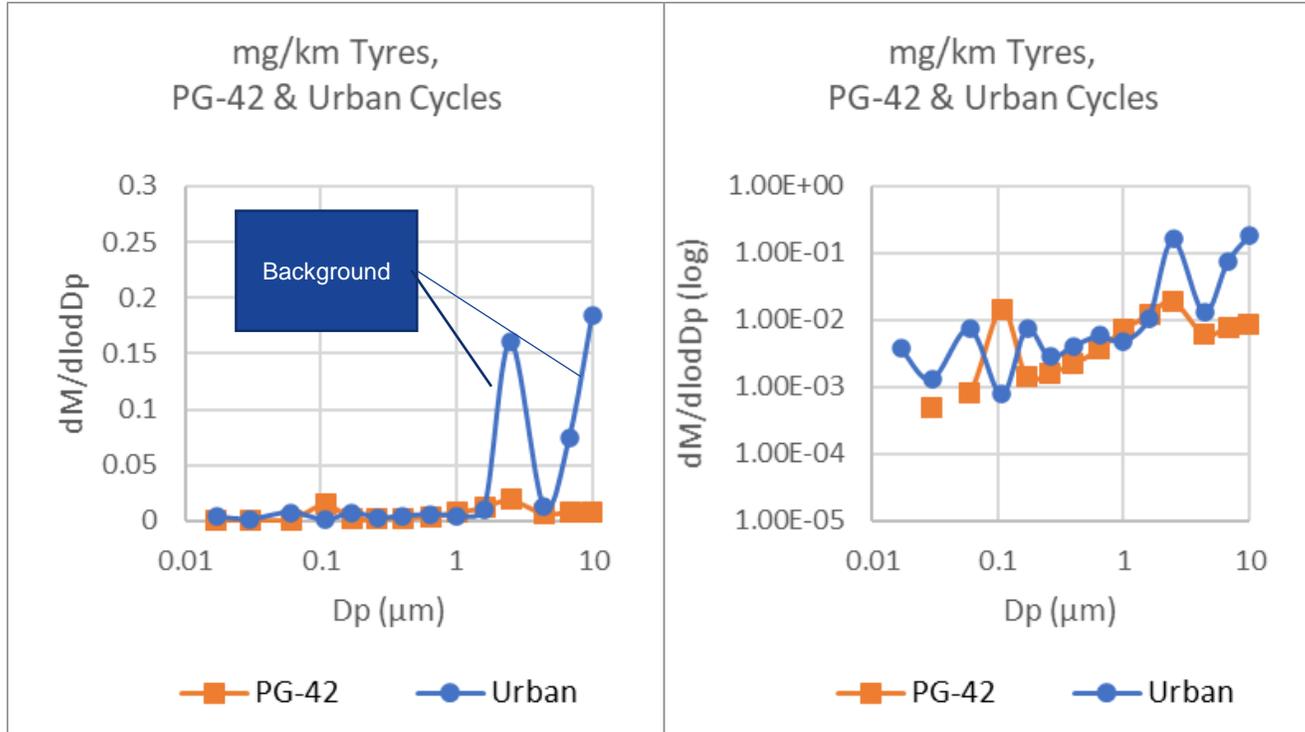

linear scale

log scale

- Chassis dyno PG-42 emissions are much lower than urban, despite the increased braking severity
 - Background contribution very high from $>1\mu m$ materials

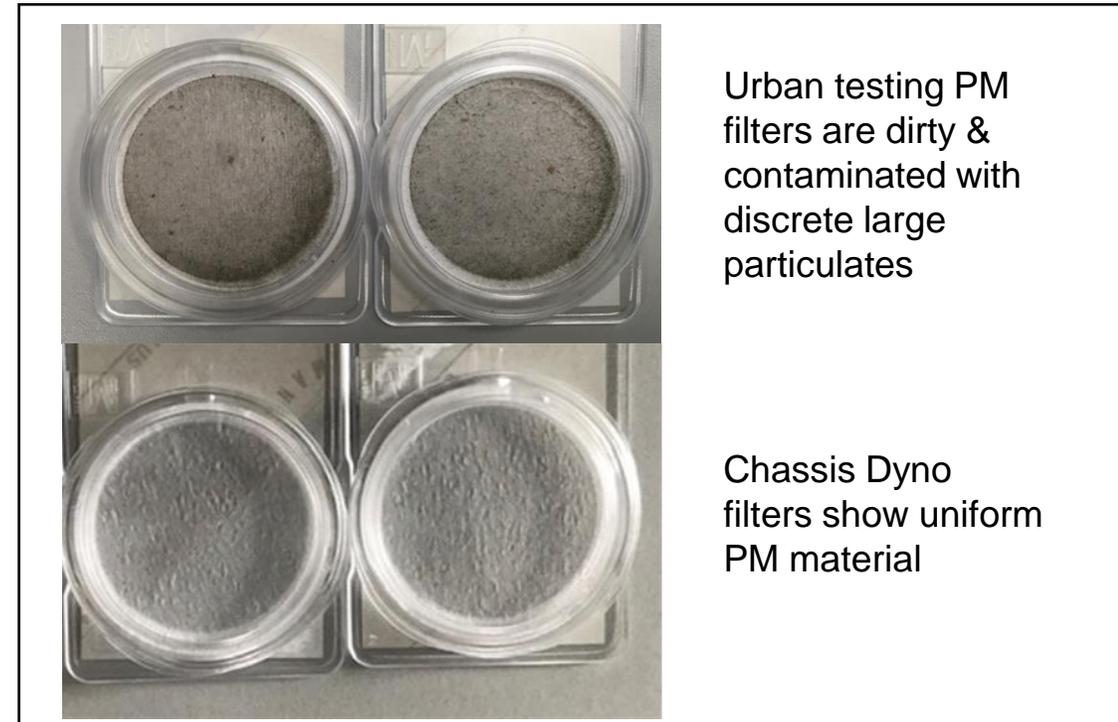

Urban testing PM filters are dirty & contaminated with discrete large particulates

Chassis Dyno filters show uniform PM material

Summary

- An on-road system for measuring brake and tyre wear was developed and installed to a small light duty van
- Testing was successfully undertaken in a chassis dynamometer facility; on a nearby test-track; and on-road in an urban environment
- **Brakes:** Real-time non/low volatility particle number emissions corresponded to real-time braking events, with emissions around $2 - 5 \times 10^9 \#/\text{km}/\text{brake}$, lowest emissions were seen at lowest speeds
- **Brakes:** Real-time particle mass emissions responses also aligned with braking events, and mass emissions ($\sim \text{PM}_{2.5}$) were around $1 \text{mg}/\text{brake}/\text{km}$
- **Tyres:** Non-volatile PN and PM emissions can be related to individual braking events on the chassis dynamometer, but not easily on the track or road
- **Tyres:** Exact quantification of $\text{PM}_{2.5}$ and PN emissions is dependent on the sampling duct efficiency, which is currently unknown. This is to be investigated. Without correction, measured levels were lower than brakes on a per km basis
- **Tyres:** Repeated aggressive braking events appear to lead to outgassing of volatile particles from tyres, many of these particles are eliminated by the hot ELPI, heated to 200°C

Future work

- Focus on PN10 (using PN-PEMS type devices), both total and non-volatile particles
- Continue with real-time mass and a filter-based approach to enable chemical analysis and visualisation of the PM materials collected
- Optimise sampling system, e.g. for power consumption, size, flow rate
- Explore and validate sample duct for sampling measurements for tyre wear
- Test power of the measurement system to discriminate between tyre types, brake types etc
 - Study specific influences on brake particle emissions on chassis dyno, test track and road
E.g. disc and pad compositions, driving dynamics
 - Study specific influences on tyre particle emissions on chassis dyno (& tracks)
E.g. tyre compositions, tyre sizes
 - Evaluate impacts of regenerative braking and emission-reducing technologies

Report of Phase 1 will be available for download from the DfT website soon

Thank you

Contact email: louisa.kramer@ricardo.com